


Z200 Standard Wax/Resin


Product features >>

Z200 is a dependable wax/resin formulated for balanced performance and material flexibility. It prints smoothly on a wide spectrum of substrates, maintaining precise edge definition and legibility at speeds up to 8 inches per second. With its low-temperature activation and broad printer compatibility, Z200 is an ideal match for operations seeking efficient output and stable results in


Recommended substrates >>




Coated Papers



Vellum



Tags



Synthetics

Printing characteristics >>

Ink color	Black
Color density	≥ 1.8 (test on X-Rite tester)
Abrasion resistance	≥ 30 times (200g weight, test on coated papers)


Recommended printing conditions >>

Printer mode



Flat head

Print speed

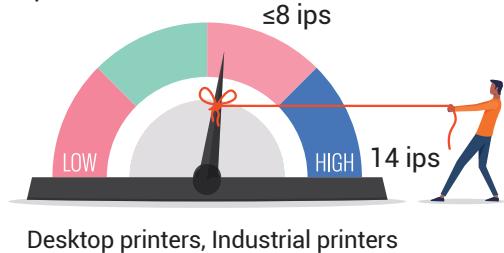

Desktop printers, Industrial printers

※Depending on the type of printer and material of substrates, the printing performance may vary.




Scan to get a quote directly



Z200 Standard Wax/Resin

Technical specifications >>

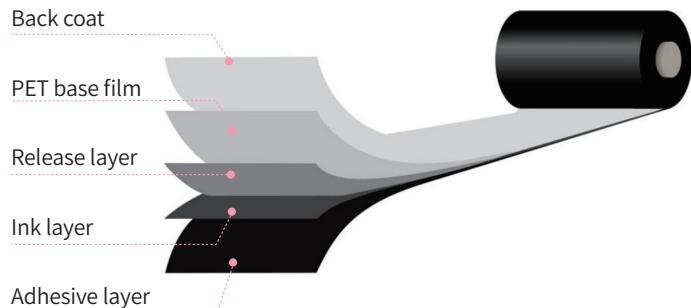

Base film	BOPET
Total ribbon thickness (μm)	6.9±0.5
Storage conditions	-5°C~40°C 20%~85% Relative Humidity
Base film thickness (μm)	4.5±0.2
Ink melting point	88°C
Shelf life	1 year

Certified product >>



RoHS 2.0



REACH



ISO9001/14001/45001



MSDS



HALOGEN FREE

Application scenario >>



Commercial retail



Storage



Logistics



Nursery gardens and flowers



Clothing tag



Pre packaging